


Item	Qty.	Description
1	1	Base Plate
2	1	43.5"h Vertical Extrusion
3	1	Counter Bottom
4	4	12"w Z45 Horizontal Extrusion
5/5A	1/1	20"w Horizontal Extrusion
6/6A	1/1	30"h Vertical Extrusion






- Steps:
- 1) Attach base plate [1] to vertical extrusion [2].
  - 2) Slide Counter Bottom [3] over vertical [2].  
**NOTE:** The counter bottom will be "free floating" until counter top is attached.
  - 3) Connect horizontals [4] to vertical [2].
  - 4) Place counter top on assembled pedestal base; attach to [3] using bolts provided
  - 5) Attach horizontal extrusion [5] to vertical [2].
  - 6) Connect vertical extrusions [6] & [6A] to lower horizontal [5].
  - 7) Attach upper horizontal [5A] to lower frame assembly.
  - 8) Plug power cord into power source.



Plugs into inside of counter to supply power for USB chargers.

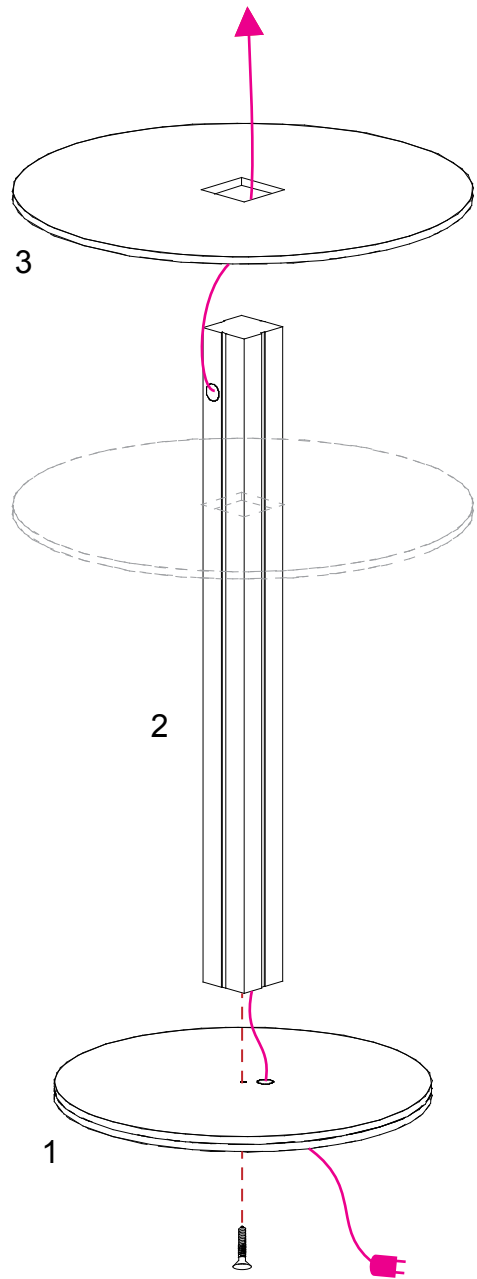


Plugs into inside of counter to supply power for USB chargers.

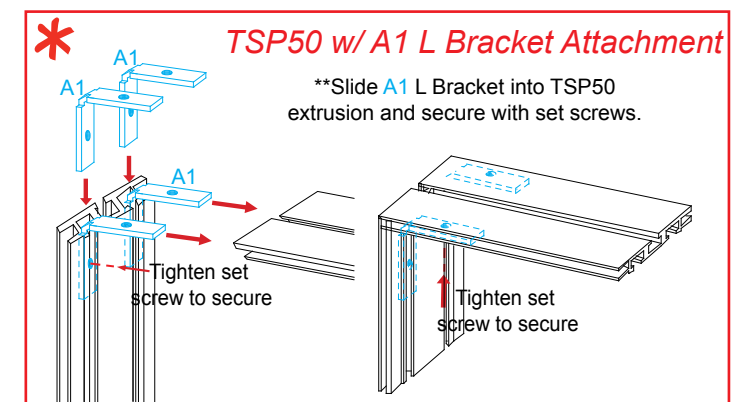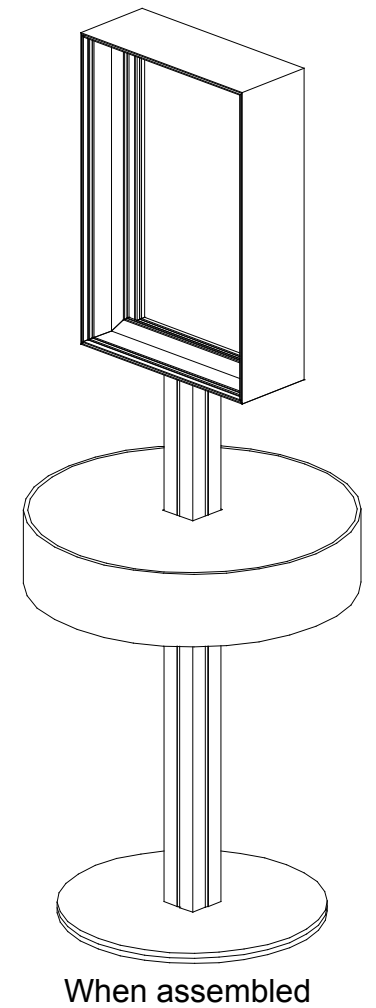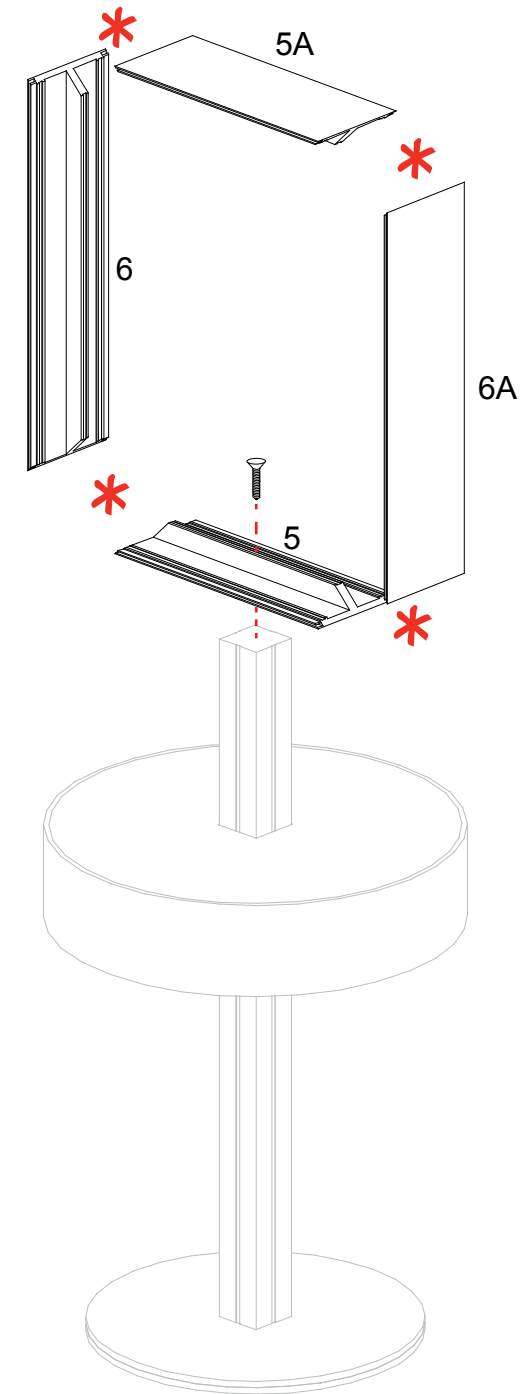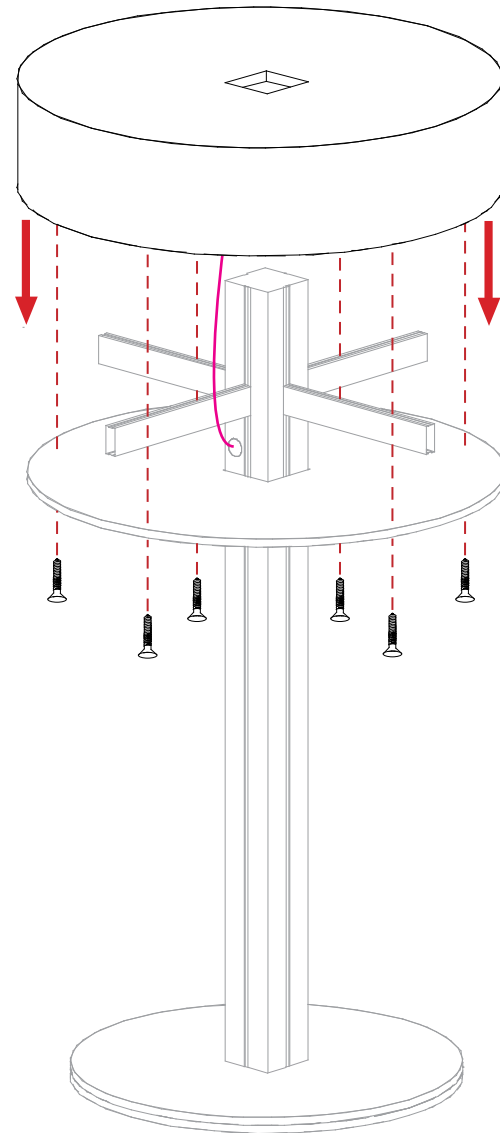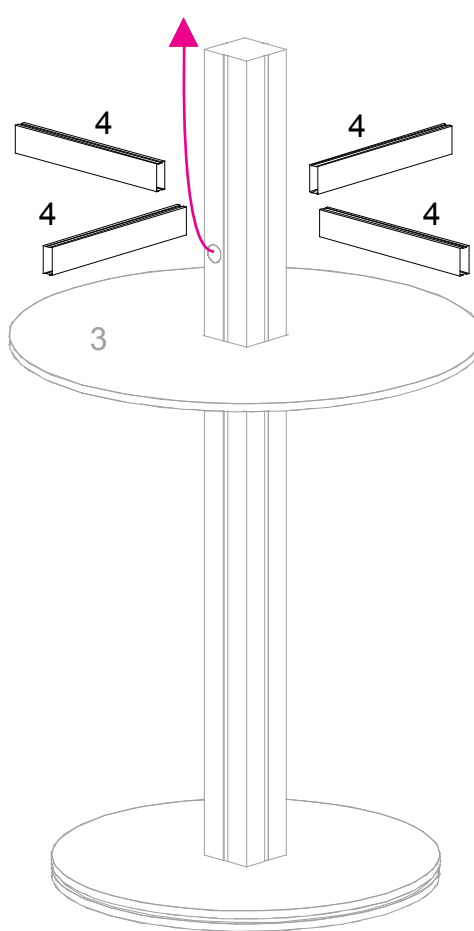


**WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING**

## General Setup Instructions

- Read entire setup instruction manual prior to unpacking parts and pieces.
- The setup instructions are created specifically for this configuration.
- Setup instructions are laid out sequentially in steps, including exploded views with detailed explanation for assembly.

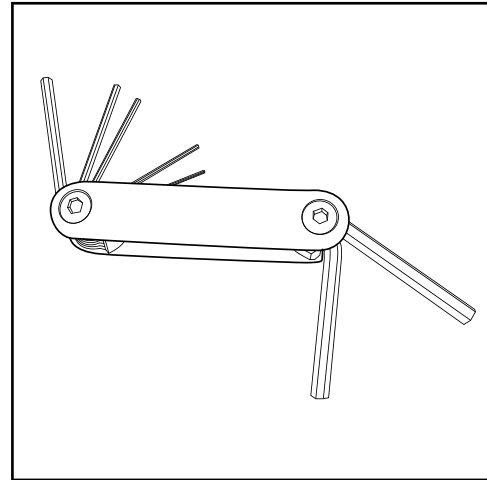

Hex Tool - Essential for Assembly

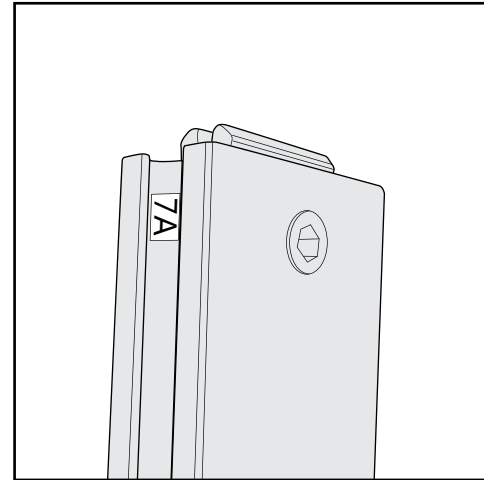

Part Identification - Numbering




# WARNING

## Cleaning & Packing


- For Cleaning Metal, Plex, & Laminate Parts: Use a **MILD NON-ABRASIVE** cleanser and soft cloth/paper towel to clean all surfaces.
- Keep exhibit components away from heat and prolonged sun exposure. **Heat and UV exposure will warp and fade components.**
- Retain all provided Packing Materials. All provided packing materials are for ease of repacking & component protection.

## Disassembly


- For loss prevention, tighten all setscrews and locks during disassembly

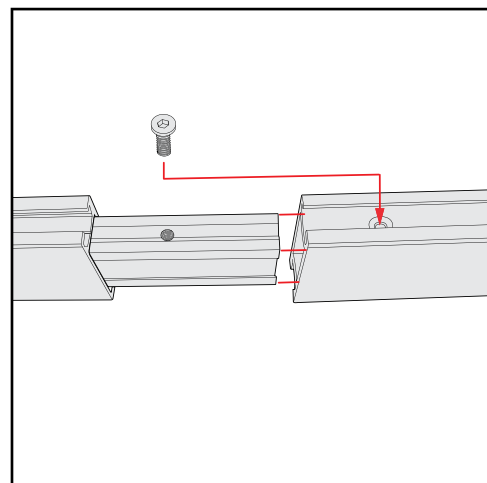


Spline Connection

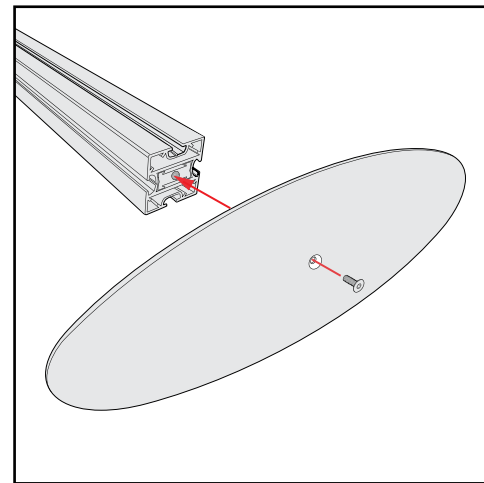


Base Plate & Extrusion Connection




DO NOT USE POWER TOOLS



LADDERS OR LIFTS MAY BE REQUIRED

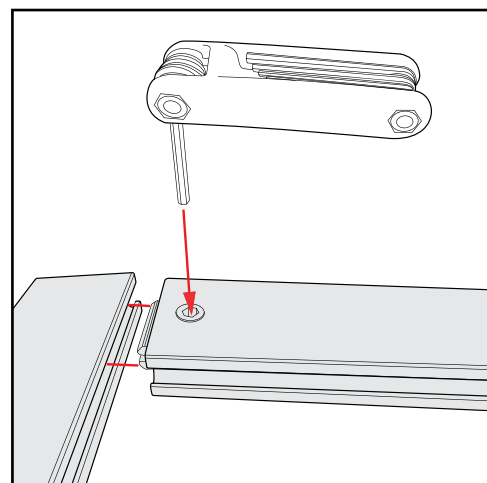

Extrusion & Lock Connection

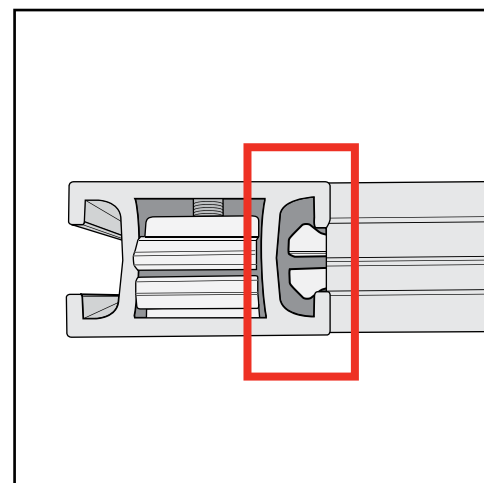

Engaged Lock



ALL CONNECTIONS MUST BE TIGHTLY SECURED

**WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING**

WHEN DISASSEMBLING ALUMINUM EXTRUSION, TIGHTEN ALL SETSCREWS AND LOCKS TO PREVENT LOSS DURING SHIPPING